

深圳市占開科技有限公司

ShenZhen ZhanKai Technology CO.,LTD

TEL:0769-81802125

FAX:0769-81802126

DOCUMENT NO.


RDE0066A

SERIAL NO.

A1255H00-NP

Material: Nylon 66 UL 94V-0 (Beige)

① 2~5 pin models have no locking device.

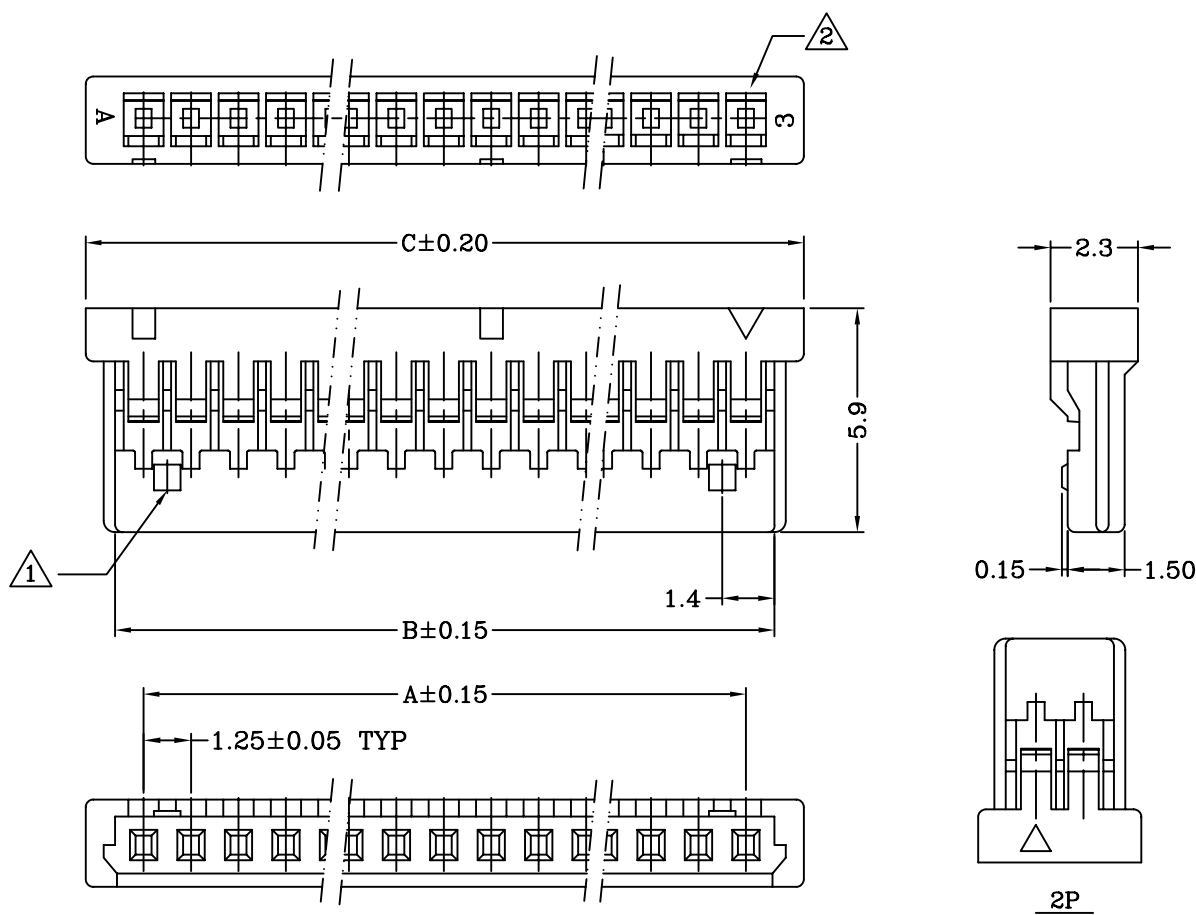

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Pcs/Bag
		A	B	C	
2	A1255H00-2P	1.25	2.75	4.30	1000
3	A1255H00-3P	2.50	4.00	5.55	1000
4	A1255H00-4P	3.75	5.25	6.80	1000
5	A1255H00-5P	5.00	6.50	8.05	1000
6	A1255H00-6P	6.25	7.75	9.30	1000
7	A1255H00-7P	7.50	9.00	10.55	1000
8	A1255H00-8P	8.75	10.25	11.80	1000
9	A1255H00-9P	10.00	11.50	13.05	1000
10	A1255H00-10P	11.25	12.75	14.30	1000
15	A1255H00-15P	17.50	19.00	20.55	1000
20	A1255H00-20P	23.75	25.25	26.80	1000
25	A1255H00-25P	30.00	31.50	33.05	1000
30	A1255H00-30P	36.25	37.75	39.30	1000

REV.	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
①	NEW DRAWING	mm	*** ± 0.08		王昊	——	邹朝辉
②			** ± 0.15				
③			* ± 0.25				

深圳市占開科技有限公司

ShenZhen ZhanKai Technology CO.,LTD

TEL:0769-81802125


FAX:0769-81802126

DOCUMENT NO.

RDE0065A

SERIAL NO.

A1255T

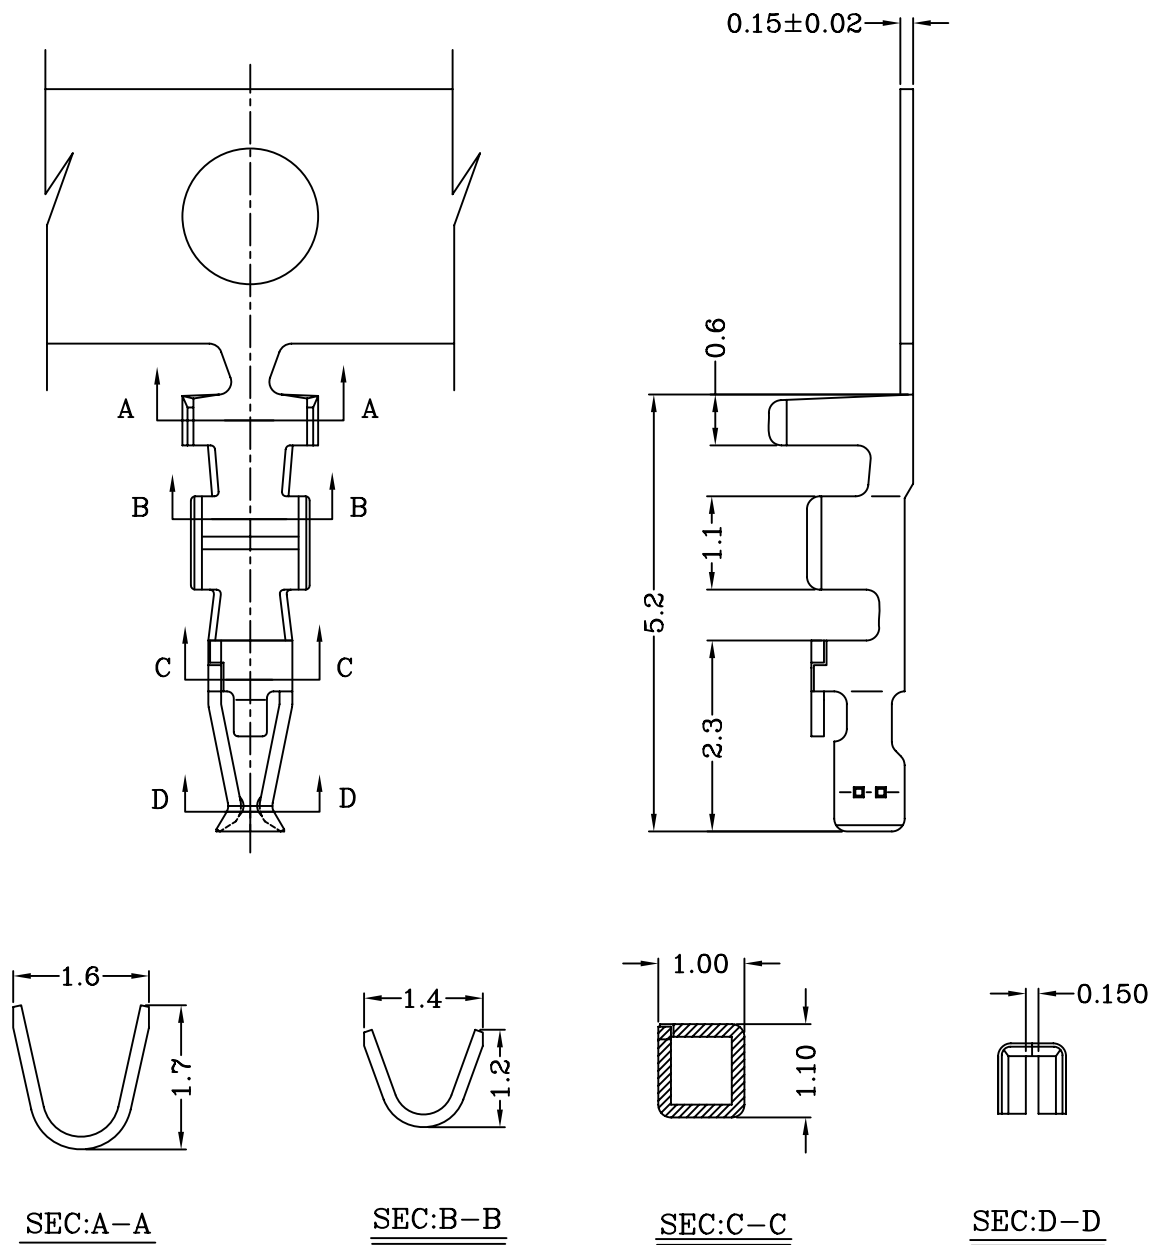

Specification & Ordering Information:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1255TOP-2	AWG #28~#32	0.90mm(max)	Phosphor bronze	Tin-plated	20,000 pcs

REV.	ECN NO.	UNIT	TOLERANCE	PROJECTION	DRAWING	CHECK	APPROVAL
A	NEW DRAWING	mm	*** ±0.08		王昊	——	邹朝辉
B	N2005041		** ±0.15				
			* ±0.25				