

东莞市志展五金塑胶制品有限公司

DongGuan ZhiZhan Hardware Plastic Products Co., LTD

TEL:0769-81802125

FAX:0769-81802126

DOCUMENT NO.

RDE0324A

SERIAL NO.




F6001H02-4P

* Material:Nylon 66 UL 94V-2




* Unit quantity:500 Pcs/Bag

Specifications:

Poles	4Poles
Plug Diameter	5.08mm
Rated Voltage	250V AC,DC
Rated Current	7A(AWG#18)
Withstand Voltage	1500V AC/minute
Contact Resistance	10mΩ(MAX)
Insulation Resistance	1000mΩ(MIN)
Temperature Range	-25°C ~ +85°C*
Applicable Wire Range	AWG #18~#22

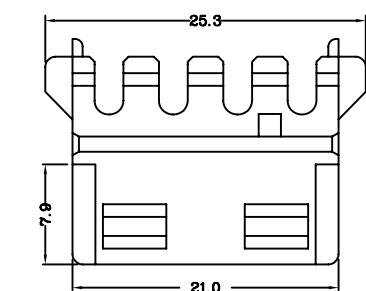

F6001C02-180

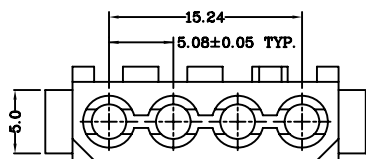

ordering information:

F6001 H 0 0 - 4 P E

1 2 3 4 5 6

1. Series No.

2. H=Housing

3. 0:180°

R:90°

4. 0=UL 94V-0

2=UL 94V-2




5. No of Circuits

6. Color: _=Natural (AWG 18#)


E=Yellow (AWG 20#)

G=Blue (AWG 22#)

F6001 Series 5.08mm Pitch crimp terminal

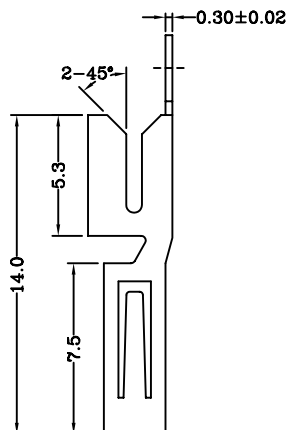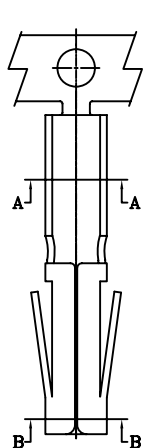

Section A-A



Section B-B

Specifications & Ordering Information:

Part No	Wire Range	Material	Finish	Qty/reel
F6001T0P-2-18	AWG #18	Phosphor bronze	Tin-plated	5,000 PCS
F6001T0P-2-20	AWG #20	Phosphor bronze	Tin-plated	5,000 PCS
F6001T0P-2-22	AWG #22	Phosphor bronze	Tin-plated	5,000 PCS